

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) are the specification and claim of a nonprovisional patent application of:

Shigetaka TANAKA

Inventor

METHOD AND APPARATUS FOR GROUP 3 FACSIMILE CAPABLE OF PROPERLY PERFORMING A COMMUNICATIONS OPERATION USING OPTIONAL FRAMES

Title of Invention

APPLICATION ELEMENTS ENCLOSED:

1. X Specification (total pages 31) including:
 - a. 4 pages of claims (6 claims)
 - b. 1 page Abstract
2. X 10 sheets of informal X formal drawings (Figs. 1-11)
3. Oath or declaration of Applicant(s) (total pages)
 - a. Newly executed (original or copy)
 - b. Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Item 14 completed)
4. Deletion of Inventor(s)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
5. Incorporation By Reference
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied in item 3b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)

APPLICATION PARTS ENCLOSED:

7. An assignment of the invention to Ricoh Company, Ltd. (cover sheet & document(s))
8. 37 CFR 3.73(b) Statement (when there is an assignee)
9. Power of Attorney
 - a. Newly executed (original or copy)
 - b. Copy from a prior application

10. ___ Information Disclosure Statement (IDS)/PTO-1449
___ Copies of IDS Citations
11. ___ A Preliminary Amendment
12. X Return Receipt Postcard (MPEP 503)
13. ___ A small entity statement under 37 C.F.R. §1.9 and §1.27
___ Statement filed in prior application, status still proper and desired
14. ___ If a Continuing Application, *check the appropriate box and supply the requisite information:*
☐ Continuation of prior application No.: _____ filed _____

☐ Divisional of prior application No.: _____ filed _____

☐ Continuation-in-part (CIP) of prior application No.: _____ filed _____
15. ___ Amend the specification by inserting before the first line of page one: --This is a ___ continuation
___ divisional of application Serial No. _____ filed _____
16. X Priority of application No. 10-129825 filed in Japan on May 13, 1998. Applicant hereby
claims priority under 35 U.S.C. § 119.
X A certified copy of priority application No. 10-129825 is enclosed
___ A certified copy of priority application No. _____ has been filed in prior application
S.N. _____ filed _____
17. ___ Other (identify) _____


The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT

					Rate			Fee	
	Number Filed		Number Extra*		Small Entity	Other Entity		Small Entity	Other Entity
Total Claims	6 - 20	=	0	x	\$ 9	\$ 18	=	\$	\$ 0
Indep. Claims	4 - 3	=	1	x	\$ 39	\$ 78	=	\$	\$ 78
Multiple Dependent Claims Presented: Yes ___ No <u>X</u>					\$130	\$260	=	\$	\$
If the difference in column 1 is less than zero, enter "0" in column 2					Basic Fee			\$ 380	\$ 760
					Total Fee				\$ 838

- CORRESPONDENCE ADDRESS:

Respectfully submitted,


 RICHARD F. JAWORSKI, Reg. No. 33,515
 Attorney for Applicant
 c/o Cooper & Dunham LLP
 1185 Avenue of the Americas
 New York, New York 10036
 Tel.: (212) 278-0400

Application
for
United States Letters Patent

To all whom it may concern:

Be it known that,

Shigetaka TANAKA

have invented certain new and useful improvements in

*METHOD AND APPARATUS FOR GROUP 3 FACSIMILE CAPABLE OF PROPERLY
PERFORMING A COMMUNICATIONS OPERATION USING OPTIONAL FRAMES*

of which the following is a full, clear and exact description:

BACKGROUND

1. Field

The disclosed method and system relates to a facsimile
10 apparatus. More particularly, the disclosed method and
system relates to a facsimile apparatus which is capable of
properly performing a facsimile communications operation
using optional frames without causing a communications error.

15 2. Description of the Related Arts

There have been developed facsimile machines capable of
performing a facsimile communications operation in accordance
with the international Group-3 facsimile communications
standard, the recommendation T.30 (hereinafter referred to as
20 the T-30) issued by ITU-T (International Telecommunication
Union; T sector). The T-30 has been updated from time to
time with additional specifications and thus includes several
optional frames such as SEP (selective polling), SUB (sub-
address), PWD (password), and so on.

25 The frame PWD is defined in a selective polling mode as
a signal for indicating that the following facsimile
information field (FIF) represents a password for allowing

entrance to a selective polling mode, which can be used for additional security to the facsimile communications procedure. The frame PWD is also defined as a signal for indicating that the following FIF represents a password for
5 allowing transmission of facsimile information during the regular communications mode.

The frame SEP is defined in the selective polling mode as a signal for indicating that the following FIF represents a sub-address to be used in the selective polling mode, which
10 can be used as an indication of an event that a specific document will be polled at the called facsimile machine.

The frame SUB is defined in the normal communications mode as a signal for indicating that the following FIF represents a sub-address assigned to a terminal machine
15 within a domain where the called facsimile machine is located, which can be used as additional routing information in the facsimile communications procedure.

Such an addition of the optional frames to the Group-3 facsimile communications protocol particularly improves the
20 polling mode operation in the facsimile communications procedure. For example, it becomes possible for a calling facsimile machine in the polling mode to easily select receivable image information files as well as to enhance the level of information security. Also, it becomes possible
25 for a calling facsimile machine in the polling mode to designate a destination terminal to which the files are to be

transferred. For example, when a calling facsimile machine is coupled to a local area network, it can use the optional frames to designate a destination terminal at which the files can be received.

- 5 However, the facsimile machines which use the above-mentioned optional frames have a problem. As described above, the recommendation T-30 defines the optional frames from the functional point of view. However, the T-30 does not define the way the optional frames are to be used.
- 10 Accordingly, the manufacturers of such facsimile machines need to establish an agreement on the usage of the optional frames. This is a way to ensure the performance of the facsimile communications operation between the facsimile machines manufactured by different manufacturers without
- 15 causing problems. However, some manufacturers do not necessarily participate in the agreement and, therefore, freely produce facsimile machines which may not conform to the common specification of optional frames. Accordingly, these non-conformable facsimile machines may cause a
- 20 facsimile apparatus a problem in a communications operation.

SUMMARY

- The present invention provides a method of a facsimile apparatus to perform the facsimile communications operation
- 25 using the optional frames with other manufacture's facsimile machines without causing a communications error. In one

embodiment, the facsimile apparatus includes the steps of providing, receiving, verifying, canceling, and executing.

The providing step provides the facsimile apparatus with a memory which prestores identification information for
5 a plurality of different facsimile machines having common specifications of optional frames. The receiving step receives a call for a facsimile communications operation using an optional frame and then identification information from a calling facsimile machine. The verifying step
10 verifies the identification information sent from the calling facsimile machine with the identification information prestored in the memory. The canceling step cancels performance of the facsimile communications operation using the optional frame when the identification information sent
15 from the calling facsimile machine is different from the identification information prestored in the memory. The executing step executes the facsimile communications operation using the optional frame when the identification information sent from the calling facsimile machine is
20 identical to the identification information prestored in the memory.

The identification information prestored in the memory may be subscriber identifications each contained in a frame TSI to be generated by each of the plurality of different
25 facsimile machines. Further, the identification information received in the receiving step may be a subscriber

identification contained in a frame TSI generated by the calling facsimile machine.

The optional frames may include SUB, SEP, and PWD in conformance with the recommendation T-30 of ITU-T.

5

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the present invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference
10 to the following detailed description when considered in connection with the accompanying drawings, wherein:

Fig. 1 is a block diagram of a facsimile apparatus according to an embodiment of the present invention;

Figs. 2 and 3 are examples of an identification table
15 and a sub-address conversion table, respectively, of the facsimile apparatus of Fig. 1;

Figs. 4 and 5 are illustrations for explaining facsimile communications procedures in a normal mode using an optional frame and in a selective polling mode using an
20 optional frame, respectively;

Fig. 6 is a flowchart for explaining an exemplary call receiving operation performed by the facsimile apparatus of Fig. 1, in which a calling facsimile machine requests using the optional frame SUB that the facsimile apparatus receives
25 facsimile information as a transfer file and transfers such a transit file to a destination terminal;

Fig. 7 is a flowchart for explaining an exemplary transit file checking operation which is performed after the call receiving operation of Fig. 6;

Fig. 8 is a flowchart for explaining an exemplary call receiving operation performed by the facsimile apparatus of Fig. 1, in which a calling facsimile machine requests using the optional frame SEP that the facsimile apparatus enters a selective polling mode and transfers a facsimile file to a destination terminal;

Fig. 9 is a flowchart for explaining an exemplary call receiving operation performed by the facsimile apparatus of Fig. 1, in which the FIF contents of TSI sent immediately after SUB is used as identification information of a calling facsimile machine;

Fig. 10 is an illustration for explaining an exemplary facsimile communications procedure in a normal mode with an optional frame SUB using a telephone number display service; and

Fig. 11 is a flowchart for explaining an exemplary call receiving operation performed by the facsimile apparatus of Fig. 1, under the telephone number display service.

DETAILED DESCRIPTION

In describing preferred embodiments illustrated in the drawings, specific terminology is employed for the sake of clarity. However, the invention is not intended to be

limited to the specific terminology so selected and it is to be understood that each specific element includes all technical equivalents which operate in a similar manner.

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, Fig. 1 illustrates a block diagram of a facsimile apparatus 100 according to an embodiment of the present invention. The facsimile apparatus 100 of Fig. 1 includes a system controller 1, a system memory 2, a parameter memory 3, a clock circuit 4, a scanner 5, a printer 6, a display panel unit 7, an encoding/decoding unit 8, an image memory 9, a Group-3 facsimile modem 10, a network controller 11, and an internal bus 12.

15 The system controller 1 controls the operations of the facsimile apparatus 100, including facsimile data transmission controls for transmitting and receiving image information and arbitrary data files. The system memory 2 stores control (or application) programs to be executed by

20 the system controller 1 and corresponding data used when executing the control programs. The system memory 2 includes an identification table 1 and address conversion table 2 (both explained later) as well as a working memory area reserved for use by the system controller 1. The

25 parameter memory 3 stores various kinds of parameters and information specific to the facsimile apparatus 100. The

clock circuit 4 generates information of the present time.

The scanner 5 reads an image of a document at one of predetermined image reading resolutions. The printer 6 produces an image output at one of predetermined print
5 resolutions. The display panel unit 7 includes various kinds of operational keys and indicators interfacing between an operator and the facsimile apparatus 100.

The encoding/decoding unit 8 encodes image information to be transmitted to other facsimile terminals so that the
10 information is compressed. The encoding/decoding unit 8 also decodes the compressed image information, which are transmitted from other facsimile terminals, back into original image information. The transmission data memory 9 stores a plurality of files of data including image data that
15 are compressed and binary data.

The Group 3 facsimile modem 10 is preferably a Group 3 facsimile modem that performs the functions of a modem for the Group 3 facsimile machine. The facsimile modem 10 includes a low-speed modem function, such as a V.21 modem,
20 for transmitting and receiving communication protocols and a high-speed modem function, such as V.17, V.34, V.29, V.27ter modems, for mainly transmitting and receiving image information. The network controller 11 has direct connections to the Group 3 facsimile modem 10. The network
25 controller 11 includes an automatic transmitting and receiving function, and controls the connection of the

facsimile apparatus 100 to various telephone networks such as a public switched telephone network (PSTN). The above-described units of the facsimile apparatus 100 are connected commonly to the internal bus 12, directly or indirectly, as shown in Fig. 1, so as to communicate with each other.

The facsimile apparatus 100 having the above-described various units therein is configured to handle the signals of the optional frames SEP, SUB, PWD. In order to ensure a proper operation, the facsimile apparatus 100 is capable of checking a calling facsimile machine using identification information upon receiving the above optional frames. The identification information are prestored in the identification table 2a included in the system memory 2. Fig. 2 shows an example of contents of the identification table 2a. The contents of the identification table 2a are a plurality of identification information such as ID 1, ID 2, ID 3, ID 4, and so on, which can be arbitrarily changed by an operator using the display panel unit 7.

The facsimile apparatus 100 is also configured to designate a destination terminal, to which an information file is transmitted, upon receiving the frame SUB. For this purpose, the facsimile apparatus 100 uses the address conversion table 2b. Fig. 3 shows an example of contents of the table 2b, in which a plurality of information sets of a SUB number 10000001, for example, and a registered telephone number 0123-4567-8901, for example, are stored. Through

this address conversion table 2b, a SUB number 10000001, for example, is converted to a registered telephone number 0123-4567-8901, for example.

Next, an exemplary Group-3 facsimile transmission

- 5 procedure in the normal communications mode using the frame SUB is explained with reference to Fig. 4. Fig. 4 shows an exemplary Group-3 facsimile transmission procedure for sending a facsimile image from a facsimile terminal to the facsimile apparatus 100 in the normal communications mode
- 10 using the frame SUB. In order to send facsimile image information, a facsimile terminal which is a calling party initiates a call to the facsimile apparatus 100 which is a called party. The PSTN establishes a closed line between the facsimile terminal and the facsimile apparatus 100 when
- 15 the facsimile apparatus 100 accepts the call from the facsimile terminal. Then, the facsimile terminal sends a CNG (calling tone) signal to the facsimile apparatus 100 in order to declare that the calling facsimile terminal is a facsimile machine. The facsimile apparatus 100 sends back
- 20 (CSI)/DIS (CSI stands for a called subscriber identification and DIS for a digital identification signal) to the facsimile terminal so as to inform the facsimile terminal of the communications capabilities of the called facsimile apparatus 100. In this operation, CSI may not necessarily be sent.
- 25 Upon receiving (CSI)/DIS, the facsimile terminal determines transmission functions to use, based on DIS

signals from the facsimile apparatus 100, and informs the facsimile apparatus 100 of the determined functions by sending frames SUB/TSI/DCS (SUB stands for a sub-address, TSI for a transmitting subscriber identification, and DCS for a digital command signal) to the facsimile apparatus 100.

Then, the facsimile terminal sends a TCF (training check) signal to the facsimile apparatus 100 in order to perform a modem training at a modem speed which is used for the transmission of the facsimile image information. After a successful completion of the modem training, the facsimile apparatus 100 returns a CFR (confirmation to receive) signal to the facsimile terminal and becomes ready to receive facsimile image information. Upon receiving the CFR from the facsimile apparatus 100, the facsimile terminal starts to send a PIX (picture transmission) signal that includes facsimile image information to the facsimile apparatus 100 at the modem speed which is used in the training operation. Then, after completing the PIX signal, the facsimile terminal sends an EOP (end of procedure) for indicating the end of the transmission procedure to the facsimile apparatus 100.

The facsimile apparatus 100 stores the PIX signal in the image memory 9 and checks if the PIX signal includes facsimile image information in an appropriate condition. If the facsimile apparatus 100 determines that the PIX signal includes facsimile image information in an appropriate condition, the facsimile apparatus 100 sends an MCF (message

confirmation) back to the facsimile terminal. Upon receiving the MCF signal, the facsimile terminal sends a DCN (disconnect) for commanding disconnection of the line to the facsimile apparatus 100. Then, both calling facsimile
5 terminal and called facsimile apparatus 100 disconnect the line so as to end the communications session and to release the telephone line.

Then, the called facsimile apparatus 100 reads a telephone number of a destination terminal from the address
10 conversion table 2b of Fig. 3 based on the sub-address information included in the received frame SUB. After that, the facsimile apparatus 100 sends a call to the destination terminal using the telephone number and transfers the PIX signal that includes the facsimile image information to the
15 destination terminal.

In this way, the facsimile apparatus 100 performs the exemplary Group-3 facsimile transmission procedure in the normal communications mode using the frame SUB.

The frame SUB may be used for another purpose. For
20 example, SUB can contain information for specifying a password for a confidential message. In this case, for example, a message "a confidential message/please enter a password" is displayed on a display of the display panel unit
7. After that, the facsimile apparatus 100 may reproduce an
25 image on a recording sheet with the printer 6 according to the stored facsimile image information only when the password

specified by the frame SUB is entered through the display panel unit 7.

Next, an exemplary Group-3 facsimile transmission procedure in the polling mode using the frame SEP is

5 explained with reference to Fig. 5. Fig. 5 shows an exemplary Group-3 facsimile transmission procedure in the polling mode using the frame SEP in which a facsimile terminal receives facsimile image information from the facsimile apparatus 100. In order to send facsimile image
10 information, a facsimile terminal which is a calling party initiates a call to the facsimile apparatus 100 which is a called party. The PSTN establishes a closed line between the facsimile terminal and the facsimile apparatus 100 when the facsimile apparatus 100 accepts the call from the
15 facsimile terminal. Then, the facsimile terminal sends the CNG signal to the facsimile apparatus 100 in order to declare that the calling facsimile terminal is a facsimile machine. The facsimile apparatus 100 sends back (CSI)/DIS to the facsimile terminal so as to inform the facsimile terminal of
20 the communications capabilities of the called facsimile apparatus 100.

Upon receiving (CSI)/DIS, the calling facsimile terminal sends SEP/CIG/DTC (SEP stands for selective polling, CIG for calling subscriber identification) to the called
25 facsimile apparatus 100 so as to select the polling mode. Upon receiving SEP/CIG/DTC, the called facsimile apparatus

100 enters the selective polling mode, determines transmission functions to use, and informs the calling facsimile terminal of the determined functions by sending frames TSI/DCS to the facsimile terminal.

- 5 Then, the facsimile apparatus 100 sends the TCF signal to the facsimile terminal in order to perform a modem training at a modem speed which is used for the transmission of the facsimile image information. After a successful completion of the modem training, the facsimile terminal
- 10 returns the CFR signal to the facsimile apparatus 100 and becomes ready to receive facsimile image information. Upon receiving CFR from the facsimile terminal, the facsimile apparatus 100 starts to send the PIX signal, which is designated by the SEP signal, to the facsimile terminal at
- 15 the modem speed which is used in the training operation. Then, after completing the PIX signal, the facsimile apparatus 100 sends the EOP for indicating the end of the transmission procedure to the facsimile terminal.

- The facsimile terminal checks if the PIX signal
- 20 includes facsimile image information in an appropriate condition. If the facsimile apparatus 100 determines that the PIX signal includes facsimile image information in an appropriate condition, the facsimile terminal sends MCF back to the facsimile apparatus 100. Upon receiving the MCF
- 25 signal, the facsimile apparatus 100 sends DCN for commanding disconnection of the line to the facsimile terminal. Then,

both calling facsimile terminal and called facsimile apparatus 100 disconnect the line so as to end the communications session and to release the telephone line.

In this way, the facsimile apparatus 100 performs the
5 exemplary Group-3 facsimile transmission procedure in the selective polling mode using the frame SEP.

Next, exemplary operations of the facsimile apparatus 100 in the normal facsimile information receiving mode are explained with reference to Figs. 6 and 7. Fig. 6
10 illustrates a call receiving operation to be performed by the facsimile apparatus 100 when it receives a call from a calling facsimile terminal. When the facsimile apparatus 100 receives a call, it enters the operation of Fig. 6. In Step S101, the system controller 1 of the facsimile apparatus
15 100 sends (CSI)/DIS to the calling facsimile terminal. In Step S102, the facsimile apparatus 100 receives SUB/TSI/DCS. Then, in Step S103, the system controller 1 receives TCF, performs the modem training properly, and sends CFR. Thereby, the modem speed is determined.
20 The process of Step S104 checks if the identification information sent from the calling facsimile terminal is identical to the information registered in the identification table 2a. If the identification information is not identical and the check result of Step S104 is NO, the system
25 controller 1 performs in Step S105 the normal facsimile receiving operation and then ends the procedure.

U.S. PAT. OFF. SERIALS

If the identification information is identical and the check result of Step S104 is YES, the system controller 1 stores the frame SUB into the system memory 2 in Step S106. Then, in Step S107, the system controller 1 generates a file header after setting up data bits corresponding to the frame SUB and generating link information for linking the file header to the frame SUB. After that, in Step S108, the system controller 1 performs an operation for receiving the PIX signal and stores the PIX signal into the image memory 9 as a transit file which is then transferred to a destination terminal. Then, the system controller 1 ends the procedure of the call receiving operation.

Fig. 7 illustrates a transit file check operation for the facsimile apparatus 100 to check the transit files stored in the image memory 9. The facsimile apparatus 100 checks the transit files from time to time. In Step S201, the system controller 1 checks if the image information stored in the image memory 9 is a transit file. If the image information is a transit file and the check result of Step S201 is YES, the process proceeds to Step S202 in which the system controller 1 reads the FIF contents of the frame SUB using the link information to the frame SUB and, using the address conversion table 2b, generates address information with respect to a destination terminal to which the facsimile image information stored as a transit file is transmitted.

Then, based on such generated information, the system

controller 1 initiates in Step S203 a call to the destination terminal and transfers the transit file thereto. Upon completing the transfer, the system controller 1 erases the transit file from the image memory 9 and the frame SUB from the system memory 2, in Step S204. After that, in Step S205, the system controller 1 checks if all the facsimile image files stored in the image memory 9 have been checked. If all the facsimile image files have not been checked and the check result of Step S205 is NO, the process returns to Step S201 in which the system controller 1 checks whether the next facsimile image information is a transit file. If all the facsimile image files have been checked and the check result of Step S205 is YES, the system controller 1 ends the operation.

15 In this way, the facsimile apparatus 100 can perform the information transfer operation to a destination terminal in accordance with the FIF contents of the frame SUB when the identification information sent from the calling facsimile machine is identical to the information registered in the identification table 2a. Further, the facsimile apparatus 20 100 can perform the normal facsimile information receiving operation when the identification information sent from the calling facsimile machine is not identical to the information registered in the identification table 2a. Accordingly, the 25 facsimile apparatus 100 will not perform the SUB-frame-based information transfer operation but perform the normal

facsimile information receiving operation when receiving a call from an unknown facsimile terminal which may have different specifications with respect to the optional frames, including SUB, for example. Thereby, the facsimile apparatus 100 can avoid an occurrence of an erroneous communications operation with unknown terminals.

Next, an exemplary operation of the facsimile apparatus 100 in the selective polling mode is explained with reference to Fig. 8. Fig. 8 illustrates a call receiving operation to be performed by the facsimile apparatus 100 when it receives a call from a calling facsimile terminal in the selective polling mode. When the facsimile apparatus 100 receives a call, it enters the operation of Fig. 8. In Step S301, the system controller 1 of the facsimile apparatus 100 sends (CSI)/DIS to the calling facsimile terminal. In Step S302, the facsimile apparatus 100 receives SEP/CIG/DTC and enters the polling mode.

Then, the process of Step S303 checks if the identification information sent from the calling facsimile terminal is identical to the information registered in the identification table 2a. If the identification information is not identical and the check result of Step S303 is NO, the process proceeds to Step S304 in which the system controller 1 terminates the call receiving operation in the selective polling mode and disconnects the telephone line. Then, the facsimile apparatus 100 ends the operation. In this case,

the facsimile apparatus 100 does not perform the SEP-frame-based polling information transmission operation.

If the identification information is identical and the check result of Step S303 is YES, the system controller 1
5 performs in Step S305 the SEP-frame-based polling information transmission operation. Thereby, the image information designated by the FIF contents of the frame SEP which is sent from the calling facsimile machine is transmitted to the calling facsimile machine in accordance with a predetermined
10 transmission procedure. Then, the process proceeds to Step S304 to terminate the call receiving operation in the selective polling mode and to disconnect the telephone line. After that, the facsimile apparatus 100 ends the procedure of the call receiving operation in the selective polling mode.

15 In this way, the facsimile apparatus 100 can perform the polling information transmission operation in the selective polling mode in accordance with the FIF contents of the frame SUB when the identification information sent from the calling facsimile machine is identical to the information
20 registered in the identification table 2a. Further, the facsimile apparatus 100 can terminate the polling information transmission operation in the selective polling mode when the identification information sent from the calling facsimile machine is not identical to the information registered in the
25 identification table 2a. Accordingly, the facsimile apparatus 100 will not perform the SEP-frame-based polling

information transmission operation but terminate the operation when receiving a call from an unknown facsimile terminal which may have different specifications with respect to the optional frames, including SEP, for example.

- 5 Thereby, the facsimile apparatus 100 can avoid an occurrence of an erroneous communications operation with unknown terminals.

Next, an exemplary operation of the facsimile apparatus 100 in the normal facsimile information receiving mode is explained with reference to Fig. 9. Fig. 9 illustrates a call receiving operation to be performed in the normal facsimile information receiving mode by the facsimile apparatus 100 when it receives a call from a calling facsimile terminal. This operation of Fig. 9 is similar to 15 that of Fig. 6, except for the process of Step S404. In this operation of Fig. 9, the FIF contents of the standard TSI signal immediately after the SUB signal from the calling facsimile machine is used as the identification information of the calling facsimile machine. For this purpose, the 20 identification table 2a prestores the FIF contents of the TSI signals to be generated by the facsimile machines which have the common specifications of the optional SUB frame.

When the facsimile apparatus 100 receives a call, it enters the operation of Fig. 9. In Step S401, the system 25 controller 1 of the facsimile apparatus 100 sends (CSI)/DIS to the calling facsimile terminal. In Step S402, the

facsimile apparatus 100 receives SUB/TSI/DCS. Then, in Step S403, the system controller 1 receives TCF, performs the modem training properly, and sends CFR. Thereby, the modem speed is determined.

5 The process of Step S404 checks if the identification information contained in the standard frame TSI sent from the calling facsimile terminal is identical to the information registered in the identification table 2a. If the identification information is not identical and the check
10 result of Step S404 is NO, the system controller 1 performs in Step S405 the normal facsimile receiving operation and then ends the procedure.

 If the identification information is identical and the check result of Step S404 is YES, the system controller 1
15 stores the frame SUB into the system memory 2 in Step S406. Then, in Step S407, the system controller 1 generates a file header after setting up data bits corresponding to the frame SUB and generating link information for linking the file header to the frame SUB. After that, in Step S408, the
20 system controller 1 performs an operation for receiving the PIX signal and stores the PIX signal into the image memory 9 as a transit file which is then transferred to a destination terminal. Then, the system controller 1 ends the procedure of the call receiving operation.

25 In this way, the facsimile apparatus 100 registers in the identification table 2a the FIF contents of the TSI

signal immediately after the SUB signal sent from the calling facsimile machine and regards such FIF contents of the TSI signal as identification information of the calling facsimile machine. Thereby, the facsimile apparatus 100 can easily
5 identify the calling facsimile machine by verifying the FIF contents of the TSI signal with the information stored in the identification table 2a, without applying a special protocol for this verification.

In the selective polling mode, the SEP signal is
10 immediately followed by the CIG signal. Therefore, the facsimile apparatus 100 may include another identification table for the selective polling mode, which prestores the FIF contents of the CIG signals to be generated by the facsimile machines having the common specifications of the option SUP
15 frame. If the FIF contents of the CIG and TSI signals are identical with each other, one identification table can be shared for operations of both option SUB and SEP frames.

Next, an exemplary Group-3 facsimile communications procedure using a number display service is explained with
20 reference to Figs. 10 and 11. The number display service is a function for displaying a telephone number of a calling party on a display of a called party so as to visually inform the called party who is calling. Such a service is provided through the PSTN by a telephone service provider such as the
25 NTT (Nippon Telegram and Telephone Corp.). Fig. 10 shows an exemplary Group-3 facsimile communications procedure for

sending a facsimile image from a facsimile terminal to the facsimile apparatus 100 in the normal communications mode with the option frame SUB, using the number display service.

As shown in Fig. 10, a calling party informs a called party of the telephone number thereof as a caller ID before performing the process of establishing a line connection with the called party. Accordingly, the facsimile apparatus 100 can use this caller ID to verify the identification information of the calling facsimile machines for the purpose of security in handling the option frames such as SUB, SEP, PWD, and so on. In this case, the Group-3 facsimile modem 10 may include a function for recognizing the caller ID as the identification information of the calling facsimile machines. Further, in this case, the identification table 2a may prestore the caller IDs, or the telephone numbers, of the facsimile machines which have the common specifications of the option frames such as SUB, SEP, PWD, and so on.

Fig. 11 is a flowchart of the exemplary Group-3 facsimile communications procedure of Fig. 10. When the facsimile apparatus 100 receives a call ID from the PSTN, it enters a call receiving operation in the Group-3 facsimile communications procedure. In Step S501, the system controller 1 of the facsimile apparatus 100 receives a caller ID (telephone number) from the calling facsimile machine and stores the received caller ID in the system memory 2. Then, the system controller 1 sends (CSI)/DIS to the calling

facsimile terminal in Step S502. In Step S503, the facsimile apparatus 100 receives SUB/TSI/DCS. Then, in Step S504, the system controller 1 receives TCF, performs the modem training properly, and sends CFR. Thereby, the modem speed is determined.

The process of Step S505 checks if the received caller ID stored in the system memory 2 is identical to the telephone number registered in the identification table 2a. If the received caller ID is not identical and the check result of Step S505 is NO, the system controller 1 performs the normal facsimile receiving operation in Step S506 and then ends the procedure.

If the received caller ID is identical and the check result of Step S505 is YES, the system controller 1 stores the frame SUB into the system memory 2 in Step S506. Then, in Step S507, the system controller 1 generates a file header after setting up data bits corresponding to the frame SUB and generating link information for linking the file header to the frame SUB. After that, in Step S509, the system controller 1 performs an operation for receiving the PIX signal and stores the PIX signal into the image memory 9 as a transit file which is then transferred to a destination terminal. Then, the system controller 1 ends the procedure of the call receiving operation.

In this way, the facsimile apparatus 100 registers in the identification table 2a the telephone numbers of the

facsimile machines which have the common specifications of the option frames such as SUB, SEP, PWD, and so on. Thereby, it becomes easy for the facsimile apparatus 100 to identify the calling facsimile machine by verifying the caller ID, which is the telephone number of the calling facsimile machine, with the information stored in the identification table 2a. with this operation, the facsimile apparatus 100 can identify the calling facsimile machine and properly perform the communications operation even when the calling facsimile machine sends the TSI having no proper information.

Alternatively, the identification table 2a may register a negative list of facsimile machines which do not have the common specifications of the option frames such as SUB, SEP, PWD, and so on.

The embodiment of the present application may be conveniently implemented using a conventional general purpose digital computer programmed according to the teachings of the present specification, as will be apparent to those skilled in the art. Appropriate software coding can readily be prepared based on the teachings of the present disclosure, as will be apparent to those skilled in the art. The present application may also be implemented by the preparation of application specific integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be readily apparent to those

skilled in the art.

This document claims priority rights of and is based on the subject matter described in Japanese Patent Application No. JPAP10-129825 filed on May 13, 1998, the entire contents
5 of which are herein incorporated by reference.

Numerous additional modifications and variations of the present application are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the present application may be
10 practiced otherwise than as specifically described herein.

WHAT WE CLAIM IS:

1. A facsimile communication method for performing a Group 3 facsimile communications operation using an optional frame signal, comprising the steps of:

5 providing a facsimile apparatus with a memory which prestores identification information for a plurality of different facsimile machines having common specifications of optional frames;

receiving a call for a facsimile communications
10 operation using an optional frame and identification information from a calling facsimile machine;

verifying said identification information sent from said calling facsimile machine with the identification information prestored in said memory;

15 canceling performance of the facsimile communications operation using the optional frame when said identification information sent from said calling facsimile machine does not correspond with the identification information prestored in said memory; and

20 executing the facsimile communications operation using the optional frame when said identification information sent from said calling facsimile machine corresponds to the identification information prestored in said memory.

25 2. The method as defined in Claim 1, wherein said identification information prestored in said memory comprises

subscriber identifications each contained in a frame TSI to
be generated by each of said plurality of different facsimile
machines and said identification information received in said
receiving step is a subscriber identification contained in a
5 frame TSI generated by said calling facsimile machine.

3. The method as defined in Claim 1, wherein said
optional frames include SUB, SEP, and PWD in conformance with
the recommendation T-30 of ITU-T.

10

4. A facsimile communication method for performing a
Group 3 facsimile communications operation using optional
frame signals in a calling number display service mode,
comprising the steps of:

15 providing a facsimile apparatus with a memory which
prestores identification information for a plurality of
different facsimile machines having common specifications of
optional frames;

receiving a telephone number of a calling facsimile
20 machine during a call establishing process in said calling
number display service mode and a signal requesting a
facsimile communications operation using an optional frame;

verifying said telephone number of said calling
facsimile machine received in said receiving step with the
25 identification information prestored in said memory;

canceling performance of the facsimile communications

operation using said optional frame when said identification information of said calling facsimile machine does not correspond with the identification information prestored in said memory; and

5 executing the facsimile communications operation using the optional frame when said telephone number of said calling facsimile machine corresponds to the identification information prestored in said memory.

10 5. A facsimile apparatus, comprising:
 memory means for prestoring identification information for a plurality of different facsimile machines having common specifications of optional frames;

 modem means for receiving a call for a facsimile
15 communications operation using an optional frame and identification information from a calling facsimile machine;
 and

 controller means for verifying said identification information sent from said calling facsimile machine with the
20 identification information prestored in said memory,
 canceling performance of the facsimile communications operation using the optional frame when said identification information sent from said calling facsimile machine does not
 correspond with the identification information prestored in
25 said memory, and executing the facsimile communications operation using the optional frame when said identification

information sent from said calling facsimile machine corresponds to the identification information prestored in said memory.

- 5 6. A facsimile apparatus, comprising:
- memory for prestoring identification information for a plurality of different facsimile machines having common specifications of optional frames;
- a modem for receiving a call for a facsimile
- 10 communications operation using an optional frame and identification information from a calling facsimile machine; and
- a controller for verifying said identification information sent from said calling facsimile machine with the
- 15 identification information prestored in said memory, canceling performance of the facsimile communications operation using the optional frame when said identification information sent from said calling facsimile machine does not correspond with the identification information prestored in
- 20 said memory, and executing the facsimile communications operation using the optional frame when said identification information sent from said calling facsimile machine corresponds to the identification information prestored in said memory.

ABSTRACT OF THE DISCLOSURE

A method of a facsimile apparatus includes the steps of providing the facsimile apparatus with a memory which prestores identification information for a plurality of
5 different facsimile machines having common specifications of optional frames, receiving a call for a facsimile communications operation using an optional frame and then identification information from a calling facsimile machine, verifying the identification information sent from the
10 calling facsimile machine with the identification information prestored in the memory, canceling performance of the facsimile communications operation using the optional frame when the identification information sent from the calling facsimile machine is different from the identification
15 information prestored in the memory, and executing the facsimile communications operation using the optional frame when the identification information sent from the calling facsimile machine is identical to the identification information prestored in the memory.

Fig. 1

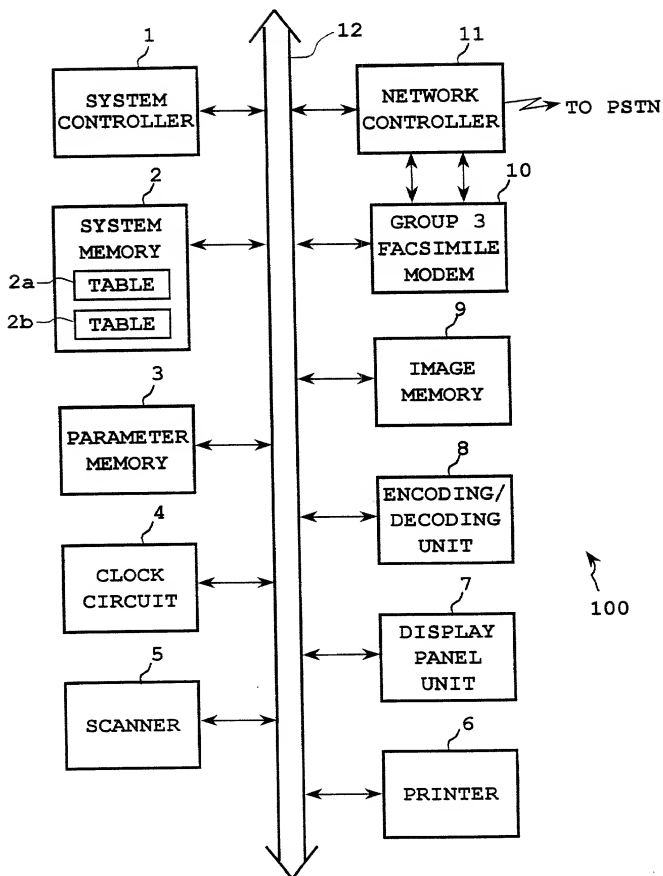


Fig. 2

2a
~

IDENTIFICATION TABLE	
IDENTIFICATION INFORMATION NO. 1	
IDENTIFICATION INFORMATION NO. 2	
IDENTIFICATION INFORMATION NO. 3	
IDENTIFICATION INFORMATION NO. 4	
...	

Fig. 3

2b
~

SUB-ADDRESS CONVERSION TABLE	
SUB-ADDRESS	REGISTERED TELEPHONE NO.
10000001	0123-4567-8901
10000002	0234-5678-9012
10000003	03-3333-33399
...	...

Fig. 4

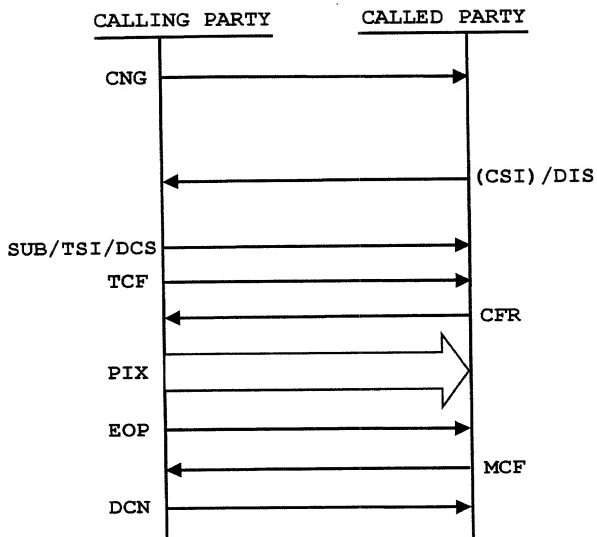
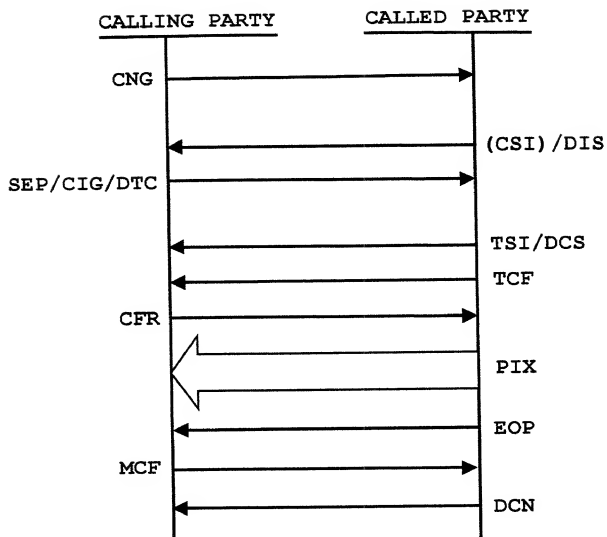
[illegible]

Fig. 5



0037260-051300

Fig. 7

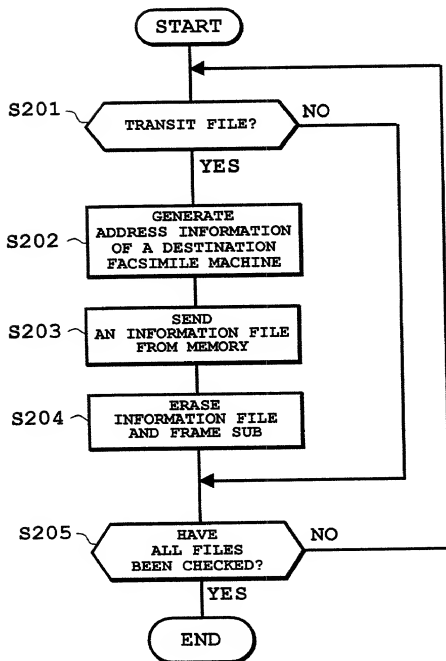
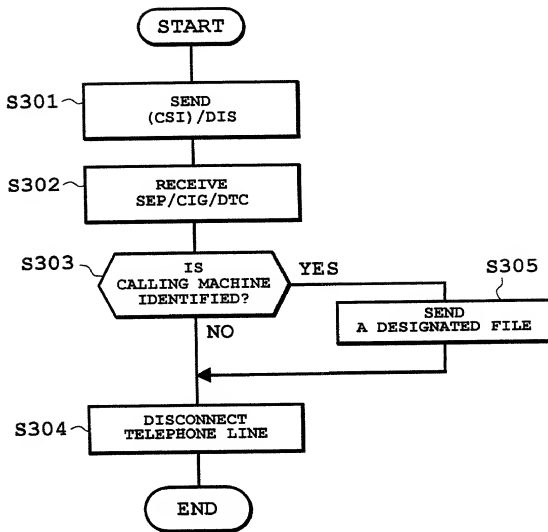


Fig. 8



202509041200

Fig. 9

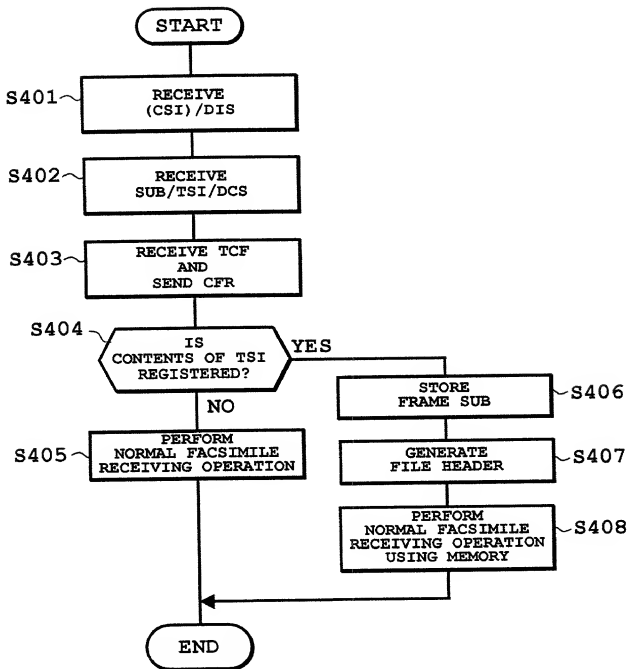


Fig. 10

